


Data Sheet | Item Number: 207-1433

Gelbox; Branch; for cables; with gel; 221 Series; max. 6 mm² connectors; without splicing connectors; Size 3; gray

<https://www.wago.com/207-1433>

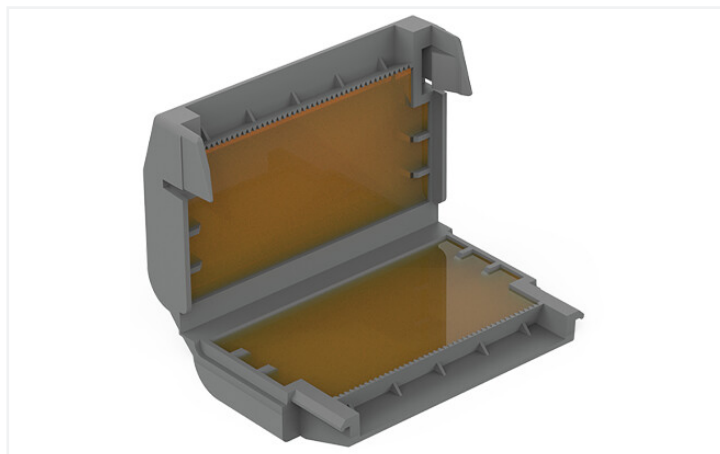

Color: ■ gray

Note on Packaging Unit (PU) and Subpackaging Unit (SPU):

If you order a full PU, you will receive our eco-friendly, sustainable cardboard blisters packed in a shelf-ready box.

If you order a quantity smaller than a full PU, you will receive the eco-friendly, sustainable cardboard blisters without a shelf-ready box.

Please refer to the system description for the splicing connectors that can be used.

Your benefits:

- Easy, fast and safe to use
- Can be used immediately and accessed again later
- Silicon-free
- Label-free
- Suitable for indefinite storage
- The complete system consisting of WAGO's gelboxes and splicing connectors has been VDE-tested and IPX8-certified.

Connection data

Connection 1

Actuation type	Locking system
----------------	----------------

Physical data

Width	40.1 mm / 1.579 inches
Height	21.3 mm / 0.839 inches
Depth	57 mm / 2.244 inches

Mechanical data

Mounting type	Flying leads
Protection type	IPX8

Material data

Note (material data)

[Information on material specifications can be found here](#)

Color gray

Housing material Polypropylene

Fire load 0 MJ

Weight 35.4 g

Environmental requirements

Ambient temperature (operation) -55 ... +85 °C

Ambient temperature (storage) 0 ... +40 °C

Commercial data

ETIM 8.0 EC001170

ETIM 7.0 EC001170

PU (SPU) 24 (2) pcs

Country of origin IT

GTIN 4055144097306

Customs tariff number 85389099990

Environmental Product Compliance

RoHS Compliance Status Compliant, No Exemption