


# Data Sheet | Item Number: 787-712

Power supply; Eco; 1-phase; 24 VDC output voltage; 2.5 A output current; DC-OK LED; 4,00 mm<sup>2</sup>

<https://www.wago.com/787-712>

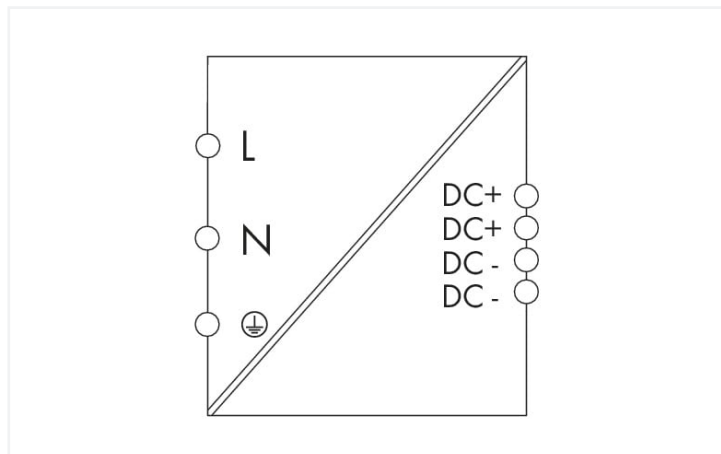

## Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per UL 60950-1; PELV per EN 60204

## Technical data

Input	
Phases	1
Nominal input voltage $U_{i, nom}$	1 x AC 100 ... 240 V
Input voltage range	1 x AC 90 ... 264 V; DC 90 ... 373 V
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current $I_i$	$\leq 0.7$ A (230 VAC); $\leq 1.2$ A (115 VAC)
Discharge current	$\leq 1$ mA
Inrush current	$\leq 30$ A
Power factor	$\geq 0.5$ (230 VAC)
Power factor correction (PFC)	passive
Mains failure hold-up time	$\geq 20$ ms (230 VAC)

Output	
Nominal output voltage $U_{o, nom}$	DC 24 V (SELV)
Output voltage range	DC 22 ... 28 V (adjustable)
Default setting	DC 24 V
Nominal output current $I_{o, nom}$	2.5 A (24 VDC)
Nominal output power	60 W
Deviation	$\leq 1$ %
Residual ripple	$\leq 100$ mV (peak-to-peak)
Overload behavior	Constant power (in overload range: 1.15 ... 1.4 x $I_{o, nom}$ ); Shutdown and automatic restart in the event of a short circuit

Signaling and communication	
Signaling	1 x LED DC OK (green) 1 x Overload LED (red)
Operation status indicator	Green LED (24 VDC OK) Red LED (overload)

Efficiency/power losses	
Power loss $P_I$	$\leq 8.3$ W (230 VAC; nominal load)
Power loss (max.) $P_{I(max)}$	11.5 W (110 VAC / 24 VDC; 2.75 A)
Efficiency (typ.)	86 % (230 VAC)

Circuit protection	
Internal fuse	F 2.5 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: 10 A, 16 A; Tripping characteristic: B or C

### Safety and protection

Isolation voltage (pri.-sec.)	DC 4.242 kV
Isolation voltage (pri.-PE)	DC 2.2 kV
Isolation voltage (sec.-PE)	DC 0.7 kV
Protection class	I
Protection type	IP20; per EN 60529
Resistance to reverse feed	≤ DC 28 V
Oversvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	480,000 h (per IEC 61709)

### Connection data

Connection type 1	Input/output
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 745 Series
Solid conductor	0.08 ... 4 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 4 mm <sup>2</sup> / 28 ... 12 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Note (conductor cross-section)	12 AWG: THHN, THWN

### Physical data

Width	50 mm / 1.969 inches
Height	92 mm / 3.622 inches
Depth from upper-edge of DIN-rail	136 mm / 5.354 inches

### Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

### Material data

Fire load	4.4 MJ
Weight	470 g

### Environmental requirements

Ambient temperature (operation)	-10 ... +70 °C
Ambient temperature (storage)	-25 ... +85 °C
Relative humidity	≤ 95% (no condensation permissible)
Derating	-3.3 %/K (> 50 °C; 230 VAC)
Climatic category	3K3 (per EN 60721)

**Standards and specifications**

Conformity marking	CE
Standards/specifications	EN 62368-1 EN 61204-3 cURus 60950-1 cULus 508 ANSI/ISA 12.12.01 (Class I Div. 2) ATEX IEC Ex SEMI F47

**Commercial data**

Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4045454908195
Customs tariff number	85044083900

**Environmental Product Compliance**

RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Bulgaria)	a447b5ed-bfab-4354-ad87-91c72437e9ed
SCIP notification number (Czech Republic)	648038fe-6170-414c-8081-c02ad85c75d0