


## Data Sheet | Item Number: 787-1722

Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 5 A output current; DC-OK LED

<https://www.wago.com/787-1722>

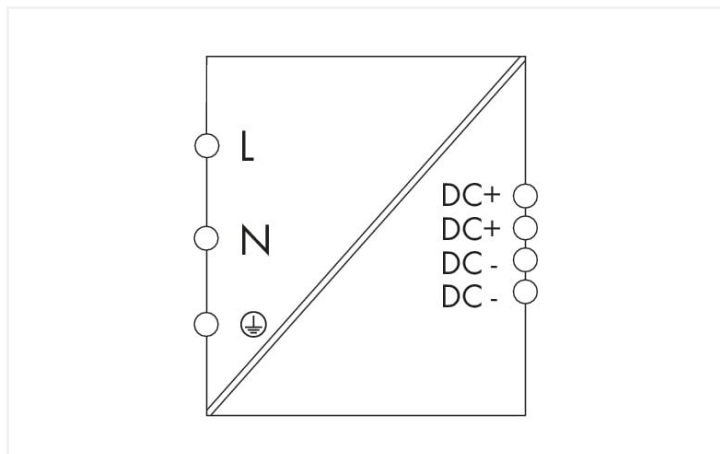

### Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60335-1 and UL 60950-1; PELV per EN 60204
- DIN-35 rail mountable in different positions
- Direct installation on mounting plate via cable grip

### Technical data

#### Input

Phases	1
Nominal input voltage $U_{i, nom}$	1 x AC 100 ... 240 V
Input voltage range	1 x AC 90 ... 264 V; DC 125 ... 375 V
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current $I_i$	$\leq 1$ A (230 VAC); $\leq 2$ A (115 VAC)
Discharge current	$\leq 1.5$ mA
Inrush current	$\leq 18$ A
Power factor correction (PFC)	passive
Mains failure hold-up time	$\geq 10$ ms (230 VAC)

#### Output

Nominal output voltage $U_{o, nom}$	DC 24 V (SELV)
Output voltage range	DC 22 ... 26 V (adjustable)
Default setting	DC 24 V
Nominal output current $I_{o, nom}$	5 A (24 VDC; 110 ... 240 VAC); 4 A (24 VDC; 100 ... 240 VAC)
Nominal output power	120 W
Deviation	$\leq 1$ %
Residual ripple	$\leq 200$ mV (peak-to-peak)
Overload behavior	Constant power (in overload range: $1.05 \dots 1.4 \times I_{o, nom}$ ); Shutdown and automatic restart in the event of a short circuit

### Signaling and communication

Signaling	1 x LED DC OK (green)
Operation status indicator	Green LED ( $U_o$ )

### Efficiency/power losses

Power loss $P_l$	$\leq 19$ W
Efficiency (typ.)	88 % (230 VAC; 5 ADC)

### Circuit protection

Internal fuse	F 2.5 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: B6, B10

### Safety and protection

Isolation voltage (pri.-sec.)	DC 4.242 kV
Isolation voltage (pri.-PE)	DC 2.2 kV
Isolation voltage (sec.-PE)	DC 0.7 kV
Protection class	I
Protection type	IP20; per EN 60529
Resistance to reverse feed	≤ DC 30 V
Overtoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes, for 2 devices of the same type
MTBF	> 300,000 h (per IEC 61709)

### Connection data

Connection type 1	Input/output
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 236 Series
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Strip length	6 ... 7 mm / 0.24 ... 0.28 inches
Note (conductor cross-section)	12 AWG: THHN, THWN

### Physical data

Width	60 mm / 2.362 inches
Height	130 mm / 5.112 inches
Depth from upper-edge of DIN-rail	99 mm / 3.898 inches

### Mechanical data

Mounting type	DIN-35 rail Screw mount
---------------	----------------------------

### Material data

Fire load	0.129 MJ
Weight	550 g

### Environmental requirements

Ambient temperature (operation)	-20 ... +60 °C
Ambient temperature (storage)	-25 ... +75 °C
Relative humidity	10 ... 95 % (no condensation permissible)
Derating	-3 %/K (> 45 °C)
Climatic category	3K3 (per EN 60721)

**Standards and specifications**

Conformity marking	CE
Standards/specifications	EN 61204-3 EN 60335-1 EN 62368-1 UL 60950-1 UL 508 SEMI F47

**Commercial data**

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143372442
Customs tariff number	85044083900

**Environmental Product Compliance**

RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Czech Republic)	7ede9750-7374-4598-8c28-b0e5d82e38fc