


Data Sheet | Item Number: 787-722

Power supply; Eco; 1-phase; 24 VDC output voltage; 5 A output current; DC-OK LED; 4,00 mm²

<https://www.wago.com/787-722>

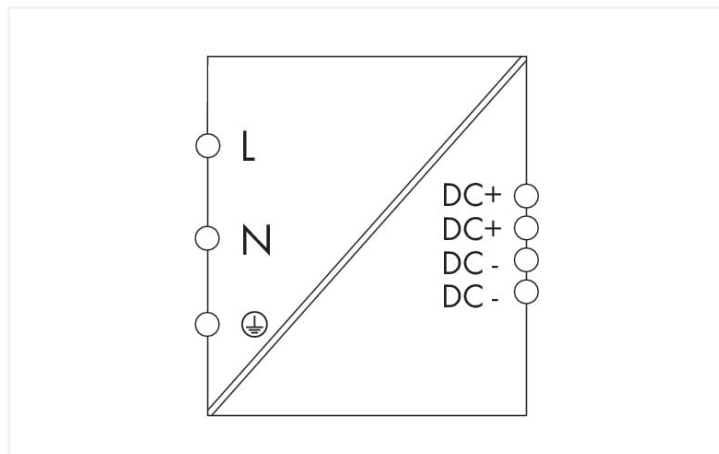

Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per UL 60950-1; PELV per EN 60204

Technical data

Input	
Phases	1
Nominal input voltage $U_{i, nom}$	1 x AC 110 ... 240 V
Input voltage range	1 x AC 90 ... 264 V; DC 90 ... 373 V
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current I_i	≤ 1 A (230 VAC); ≤ 2 A (115 VAC)
Discharge current	≤ 3.5 mA
Inrush current	≤ 30 A
Power factor	≥ 0.94 (230 VAC); ≥ 0.98 (115 VAC)
Power factor correction (PFC)	active
Mains failure hold-up time	≥ 20 ms (230 VAC)

Output	
Nominal output voltage $U_{o, nom}$	DC 24 V (SELV)
Output voltage range	DC 22 ... 28 V (adjustable)
Default setting	DC 24 V
Nominal output current $I_{o, nom}$	5 A (24 VDC)
Nominal output power	120 W
Deviation	≤ 1 %
Residual ripple	≤ 100 mV (peak-to-peak)
Overload behavior	Constant power (in overload range: 1.15 ... 1.4 x $I_{o, nom}$); Shutdown and automatic restart in the event of a short circuit

Signaling and communication	
Signaling	1 x LED DC OK (green) 1 x Overload LED (red)
Operation status indicator	Green LED (24 VDC OK) Red LED (overload)

Efficiency/power losses	
Power loss P_I	≤ 19.5 W (230 VAC; nominal load)
Power loss (max.) $P_{I(max)}$	23.5 W (110 VAC / 24 VDC; 5.5 A)
Efficiency (typ.)	86 % (230 VAC)

Circuit protection	
Internal fuse	F 3.15 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: 10 A, 16 A; Tripping characteristic: B or C

Safety and protection

Isolation voltage (pri.-sec.)	DC 4.242 kV
Isolation voltage (pri.-PE)	DC 2.2 kV
Isolation voltage (sec.-PE)	DC 0.7 kV
Protection class	I
Protection type	IP20; per EN 60529
Resistance to reverse feed	≤ DC 28 V
Oversvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	480,000 h (per IEC 61709)

Connection data

Connection type 1	Input/output
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 745 Series
Solid conductor	0.08 ... 4 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 4 mm ² / 28 ... 12 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Note (conductor cross-section)	12 AWG: THHN, THWN

Physical data

Width	75 mm / 2.953 inches
Height	92 mm / 3.622 inches
Depth from upper-edge of DIN-rail	136 mm / 5.354 inches

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Fire load	4.8 MJ
Weight	850 g

Environmental requirements

Ambient temperature (operation)	-10 ... +60 °C
Ambient temperature (storage)	-25 ... +85 °C
Relative humidity	≤ 95% (no condensation permissible)
Derating	-5.33 %/K (> 45 °C; 230 VAC)
Climatic category	3K3 (per EN 60721)

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 62368-1 EN 61204-3 cURus 60950-1 cULus 508 ANSI/ISA 12.12.01 (Class I Div. 2) ATEX IEC Ex SEMI F47

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4045454908188
Customs tariff number	85044083900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Bulgaria)	c5cda720-be2e-42e5-9f2a-5ee3811607c4
SCIP notification number (Czech Republic)	36f49618-4b21-4699-af60-f1fc5941c014